



# RAS

Wit of zwarte vaste inbouwspot met bladveren; met vervangbare CRI95 ledmodule van 640Lm; verkrijgbaar in 2700K of 3000K. Ook in IP54 variant verkrijgbaar; opbouwrand voor trimless effect. Driver apart te bestellen; beschikbaar voor zowel fase- als DALI-dimming.

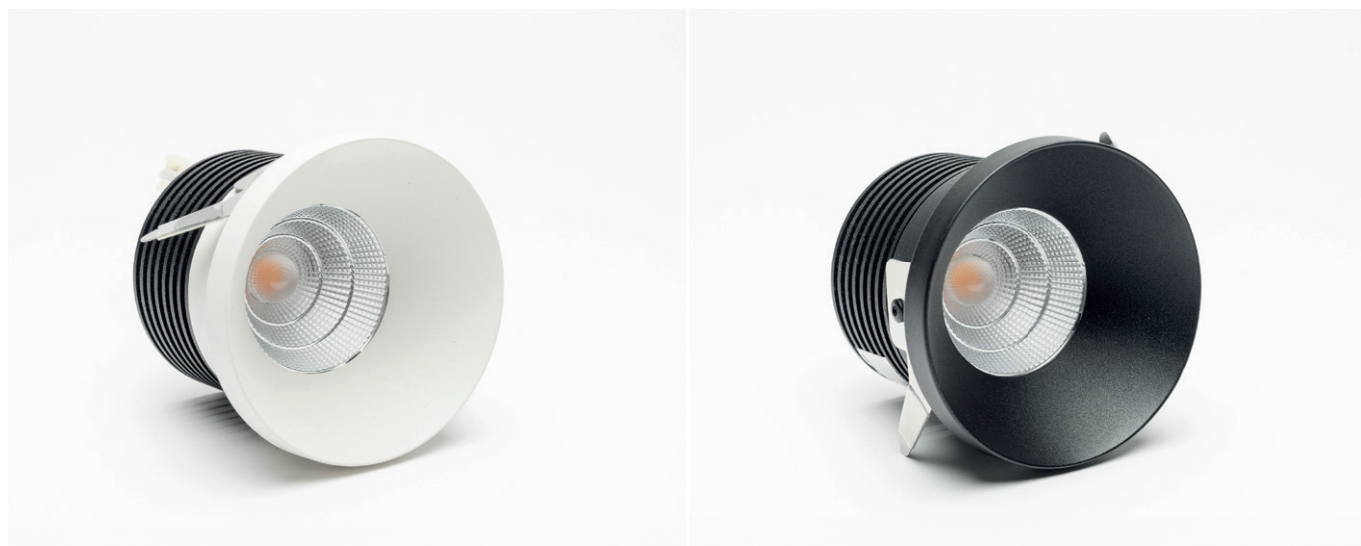

| Referentie    | Wattage                                           | Lumen | Kelvin | Kleur | Richtbaar | CRI | Stralingshoek | IP | Dimming    | InbouwØ | Veren     | Afmeting     | Input | Driver | LVD      | BK  |
|---------------|---------------------------------------------------|-------|--------|-------|-----------|-----|---------------|----|------------|---------|-----------|--------------|-------|--------|----------|-----|
| RASW27        | 8                                                 | 640   | 2700   | WIT   | /         | 95  | 40°           | 20 | TRIAC/DALI | 72mm    | Bladveren | Ø82 x 63,5mm | 200mA | Excl   | 100.000u | III |
| RASW30        | 8                                                 | 640   | 3000   | WIT   | /         | 95  | 40°           | 20 | TRIAC/DALI | 72mm    | Bladveren | Ø82 x 63,5mm | 200mA | Excl   | 100.000u | III |
| RASZ27        | 8                                                 | 640   | 2700   | ZWART | /         | 95  | 40°           | 20 | TRIAC/DALI | 72mm    | Bladveren | Ø82 x 63,5mm | 200mA | Excl   | 100.000u | III |
| RASZ30        | 8                                                 | 640   | 3000   | ZWART | /         | 95  | 40°           | 20 | TRIAC/DALI | 72mm    | Bladveren | Ø82 x 63,5mm | 200mA | Excl   | 100.000u | III |
| RASIPW27      | 8                                                 | 640   | 2700   | WIT   | /         | 95  | 40°           | 54 | TRIAC/DALI | 72mm    | Bladveren | Ø82 x 63,5mm | 200mA | Excl   | 100.000u | III |
| RASIPW30      | 8                                                 | 640   | 3000   | WIT   | /         | 95  | 40°           | 54 | TRIAC/DALI | 72mm    | Bladveren | Ø82 x 63,5mm | 200mA | Excl   | 100.000u | III |
| RASIPZ27      | 8                                                 | 640   | 2700   | ZWART | /         | 95  | 40°           | 54 | TRIAC/DALI | 72mm    | Bladveren | Ø82 x 63,5mm | 200mA | Excl   | 100.000u | III |
| RASIPZ30      | 8                                                 | 640   | 3000   | ZWART | /         | 95  | 40°           | 54 | TRIAC/DALI | 72mm    | Bladveren | Ø82 x 63,5mm | 200mA | Excl   | 100.000u | III |
| DRIVERS1      | DRIVER TRIAC DIM - 1 SPOT                         |       |        |       |           |     |               |    |            |         |           |              |       |        |          |     |
| DRIVERSM2     | DRIVER TRIAC DIM - 2 SPOTS                        |       |        |       |           |     |               |    |            |         |           |              |       |        |          |     |
| DRIVERDALIS1  | DRIVER DALI DIM - 1 SPOT                          |       |        |       |           |     |               |    |            |         |           |              |       |        |          |     |
| DRIVERDALISM2 | DRIVER DALI DIM - 2 SPOTS                         |       |        |       |           |     |               |    |            |         |           |              |       |        |          |     |
| DRIVERDALILDD | CONSTANT CURRENT DRIVER LDD 48V DALI DIM - 1 SPOT |       |        |       |           |     |               |    |            |         |           |              |       |        |          |     |

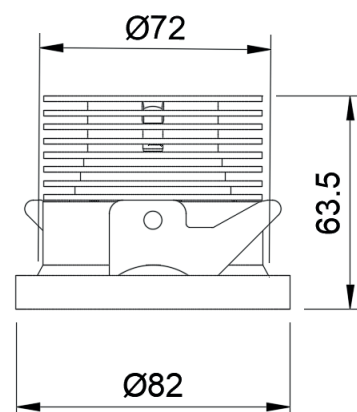