


# RGBW COBSTRIIP16W



Referentie	Wattage	Lumen	Kelvin	CRI	Stralingshoek	IP	Afmeting	Input	Levensduur	Beschermingsklasse
COBSTRIIP16WRGBW	16	/	RGBW	/	180°	20	12 x 5000mm	24Vdc	50.000u	III
NANOCOB16WRGBW	16	/	RGBW	/	180°	67	12 x 5000mm	24Vdc	50.000u	III

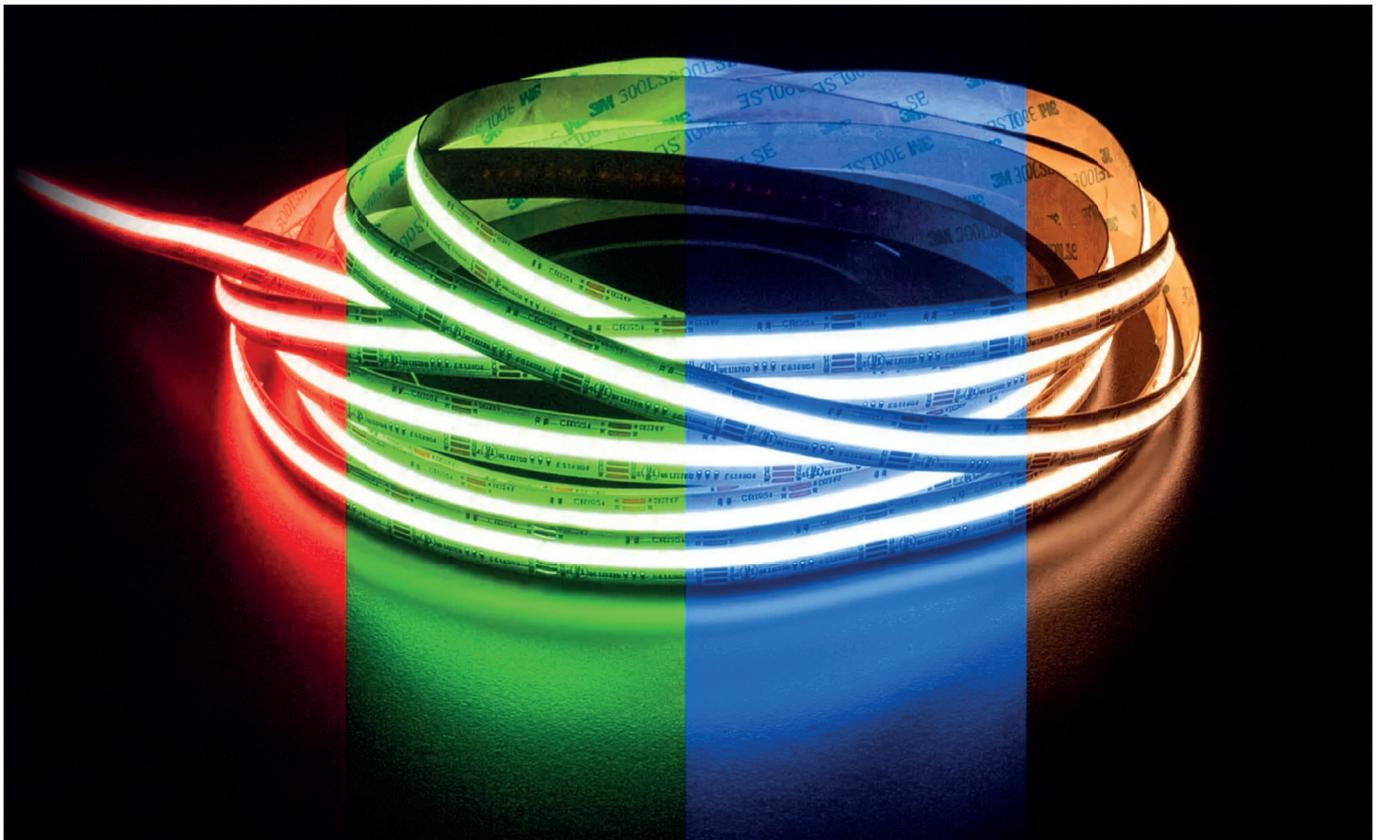